Electrolux concept counters

Refrigerators with upstand - 3 comp.

Electrolux Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.



728294

- Height-adjustable feet.
- Internal and external doors, front and side panels and worktop in 304 AISI stainless steel.
- Rounded internal corners for ease of cleaning.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Digital control panel.
- Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Drain outlet and automatic evaporation of defrost water.
- Access to all components from the front.
- In compliance with H requirements.
- C.F.C. and H.C.F.C. free.
- High-density expanded polyurethane foam 50 mm in thickness with cyclopenthane injection.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

CSQ IQNet CSQ eco ISO 14001 CE Electrolux


Electrolux concept counters
Refrigerators with upstand - 3 comp.

	HB3PU 728510	HB2P2CU 728532	HB1P4CU 728541	HB6CU 728542
TECHNICAL DATA				
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	420	420	420	420
Cooling unit	Built-In	Built-In	Built-In	Built-In
External dimensions - mm				
width	1721	1721	1721	1721
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102
height	950	950	950	950
Internal dimensions - mm				
depth	580	580	580	580
height	543	543	543	543
Upstand	●	●	●	●
Min/Max internal humidity - %	50	50	50	50
N° of drawers		2x1/2	4x1/2	6x1/2
N° and type of door	3	2	1	
Door hinges		1 Left+1 Right	Left	
Compressor power - HP	1/4	1/4	1/4	1/4
N° defrost in 24 hrs.	4/20	4/20	4/20	4/20
Refrigerant type	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	150	150	150	150
Refrigeration power - W	343	343	343	343
Refrigerant power				
at evaporation temperature - °C	-20	-20	-20	-20
Power - kW				
installed-electric	0.34	0.34	0.34	0.34
Net weight - kg.	143	147	151	154
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES				
1/1 GN GREY "RILSAN" GRID	3	2	1	
ACCESSORIES				
2x½ DRAWER KIT FOR REFRIGERATED TABLES	880118	880118	880118	880118
3x1/3 DRAWER KIT FOR REFRIGERATED TABLES	880115	880115	880115	880115
DRAWER KIT-1/3+2/3 (BOTTLES)-REF.TABLES	880126	880126	880126	880126
KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES	880139	880139	880139	880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF.TABLES	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880205	880205	880205	880205
LOCK KIT FOR REFRIGERATED TABLES	880130	880130	880130	880130
PRINTER FOR HACCP BASIC VERSION REFRIG.	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140	880140
STRUCTURE TO SUPPORT 3 GRIDS(RIGHT+LEFT)	880047	880047	880047	880047

HBAC090

2009-10-06

728510, 728542, 728541, 728532

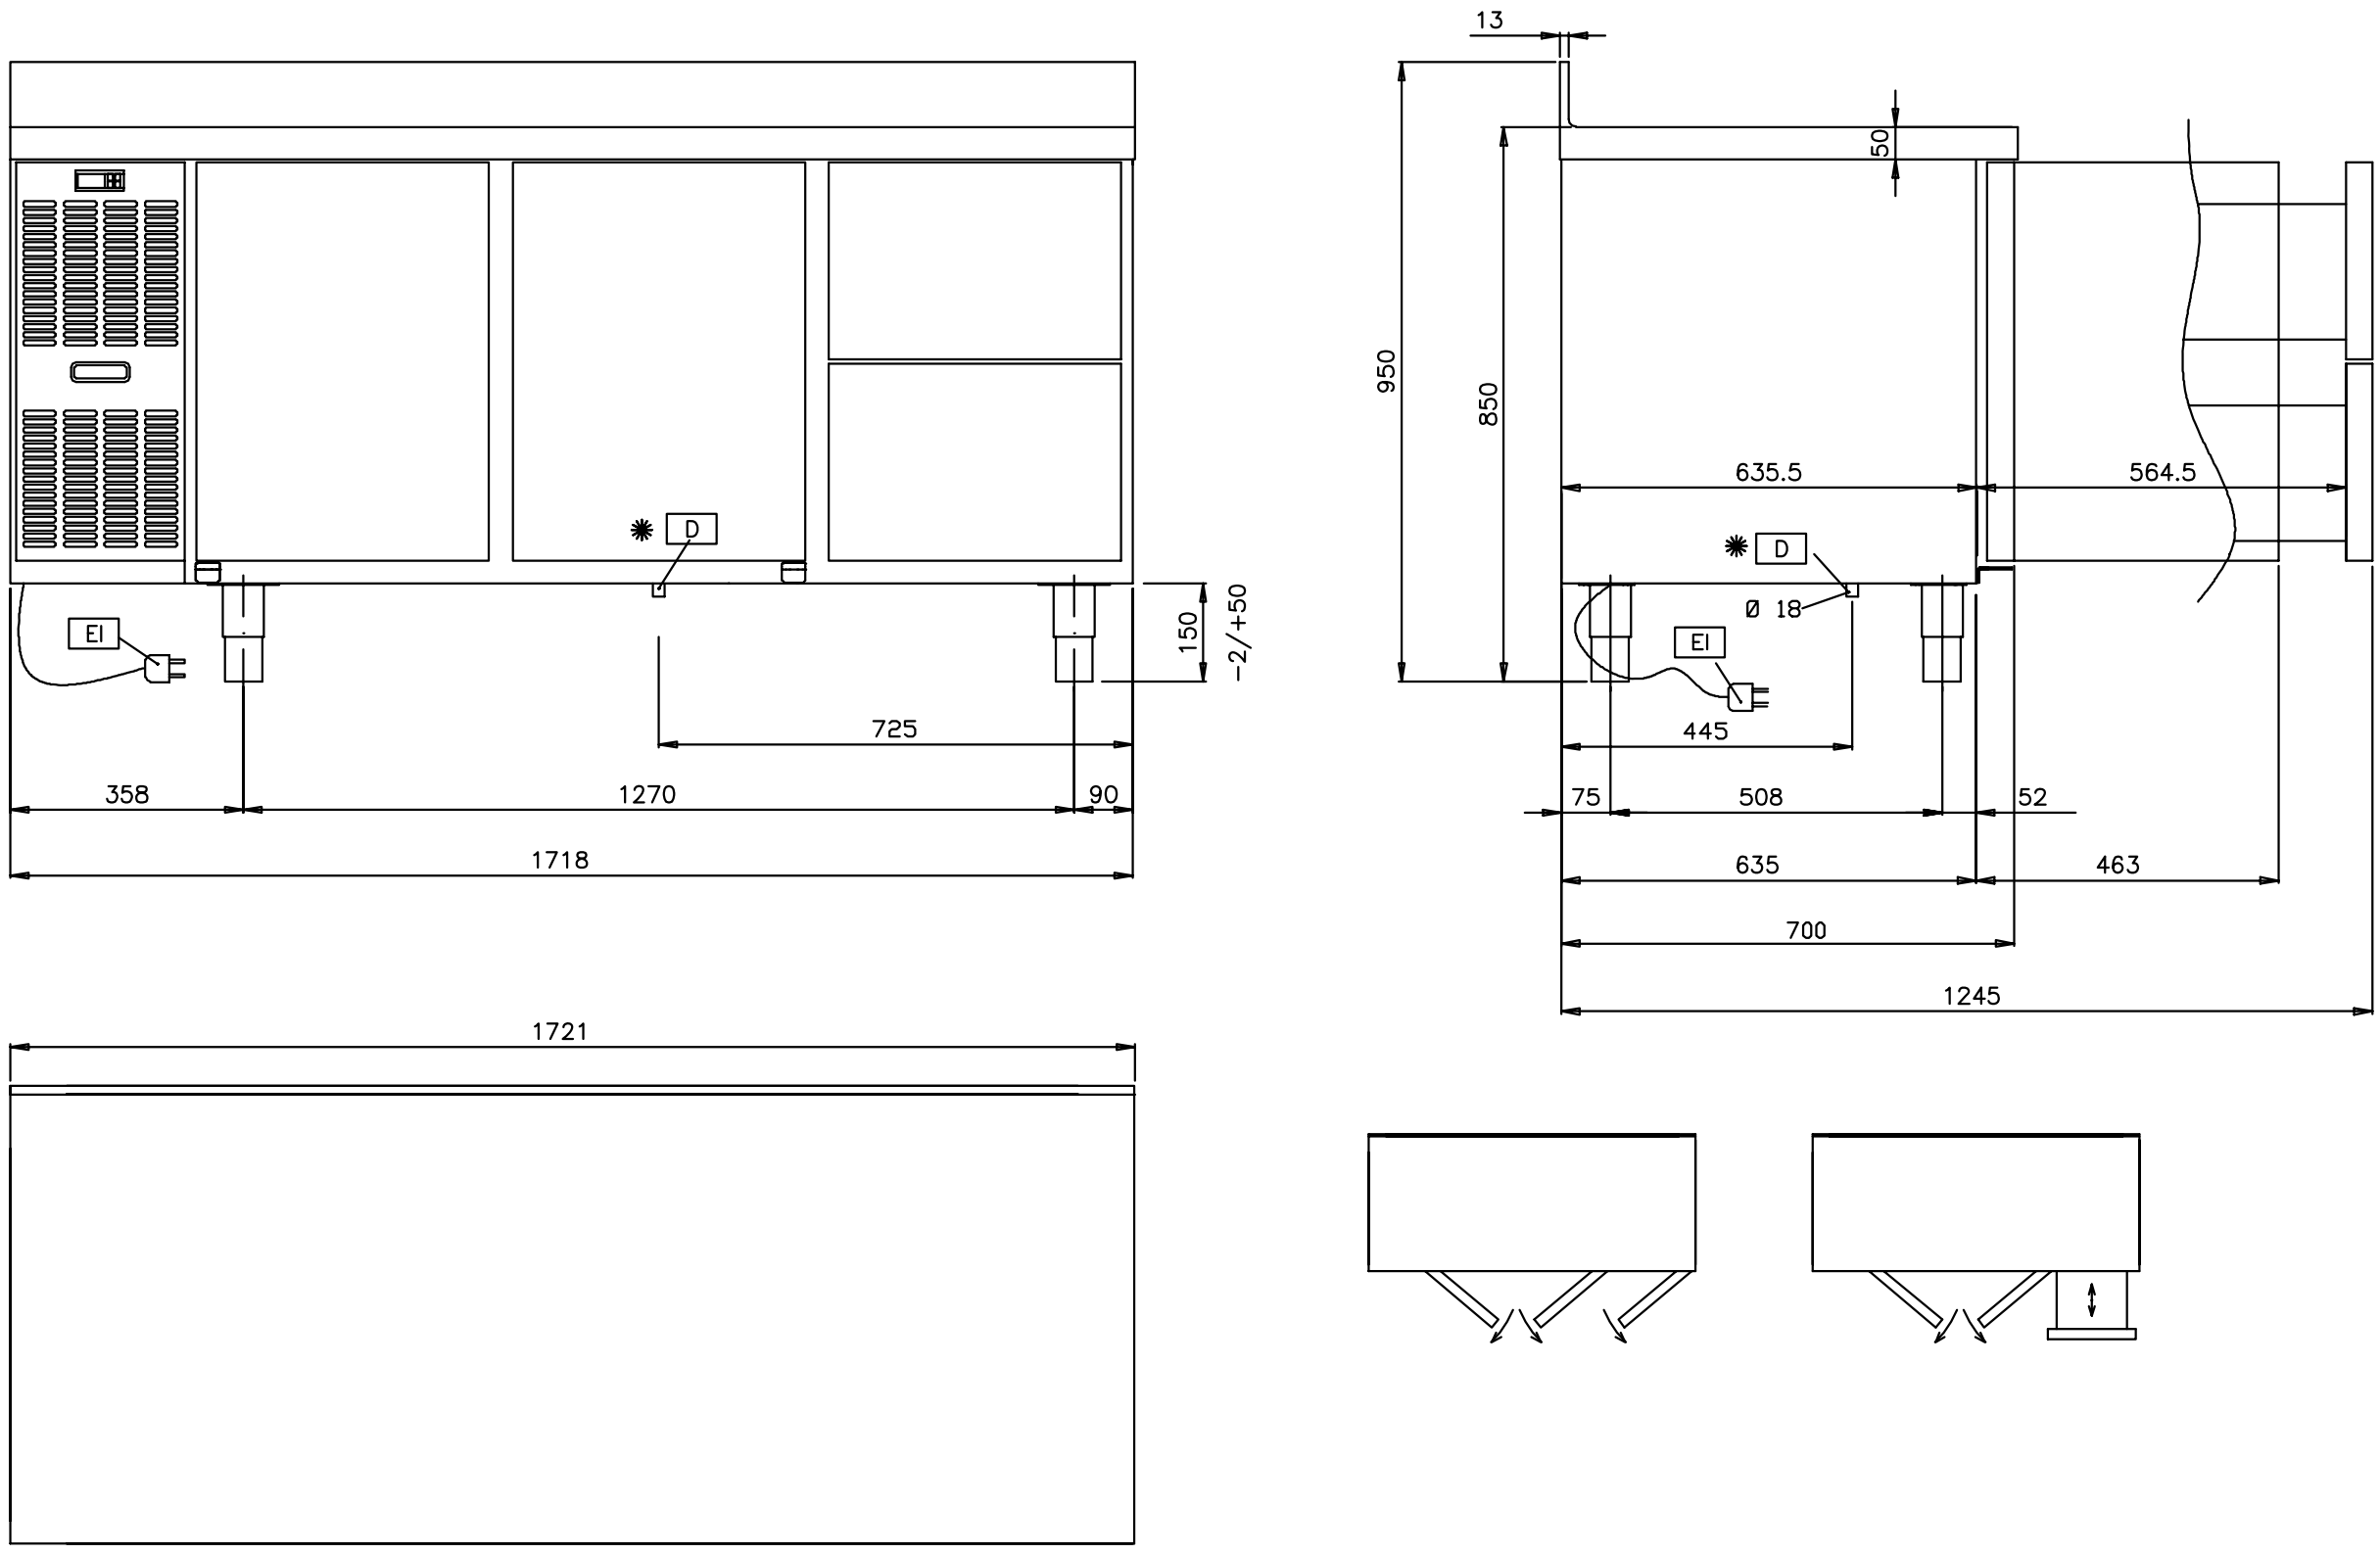

HBAC090

2009-10-06

LEGEND	HB3PU 728510	HB2P2CU 728532	HB1P4CU 728541	HB6CU 728542
D - Water drain	16mm	16mm	16mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50